


## Simple O-ring Chart

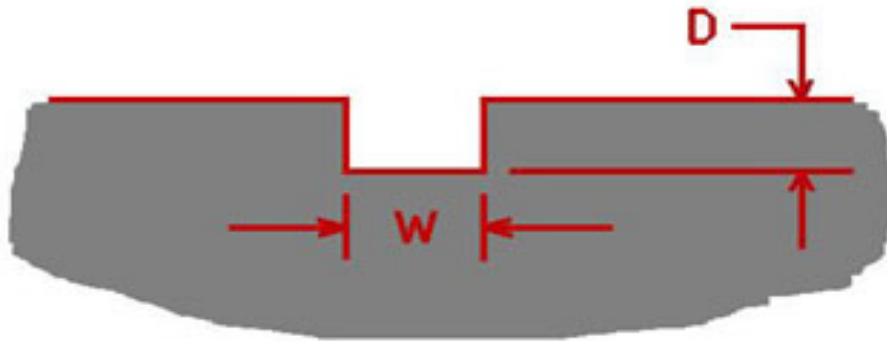

cross section						
nominal size	actual	minimum squeeze	W		D	
1/16	.07 +/- .003	.015	.088	$\begin{matrix} +.01 \\ 0 \end{matrix}$	.052	$\begin{matrix} +0 \\ -.01 \end{matrix}$
3/32	.103 +/- .003	.017	.123	$\begin{matrix} +.01 \\ 0 \end{matrix}$	.083	$\begin{matrix} +0 \\ -.01 \end{matrix}$
1/8	.139 +/- .004	.022	.165	$\begin{matrix} +.01 \\ 0 \end{matrix}$	.113	$\begin{matrix} +0 \\ -.01 \end{matrix}$
3/16	.210 +/- .005	.032	.247	$\begin{matrix} +.015 \\ -0 \end{matrix}$	.173	$\begin{matrix} +0 \\ -.015 \end{matrix}$
1/4	.275 +/- .006	.049	.330	$\begin{matrix} +.015 \\ -0 \end{matrix}$	.220	$\begin{matrix} +0 \\ -.015 \end{matrix}$